

Inspection for Glas Ampoules

Complete system
with hopper and
revolver charge

Facility



The system can be designed and built according to customers needs.


The type for inspecting long or short ampoules consists of one bunker with step feeder or vibrating feeder, where the ampoules go in manually.



Technical Data

- IP 41
- 0 - 35°C temperature / -50°C with Aircon
- 6 bar compressed pressure, 300 NL/min.
- 110-240 VAC 50-70 Hz (32A) inlet pressure

Facility

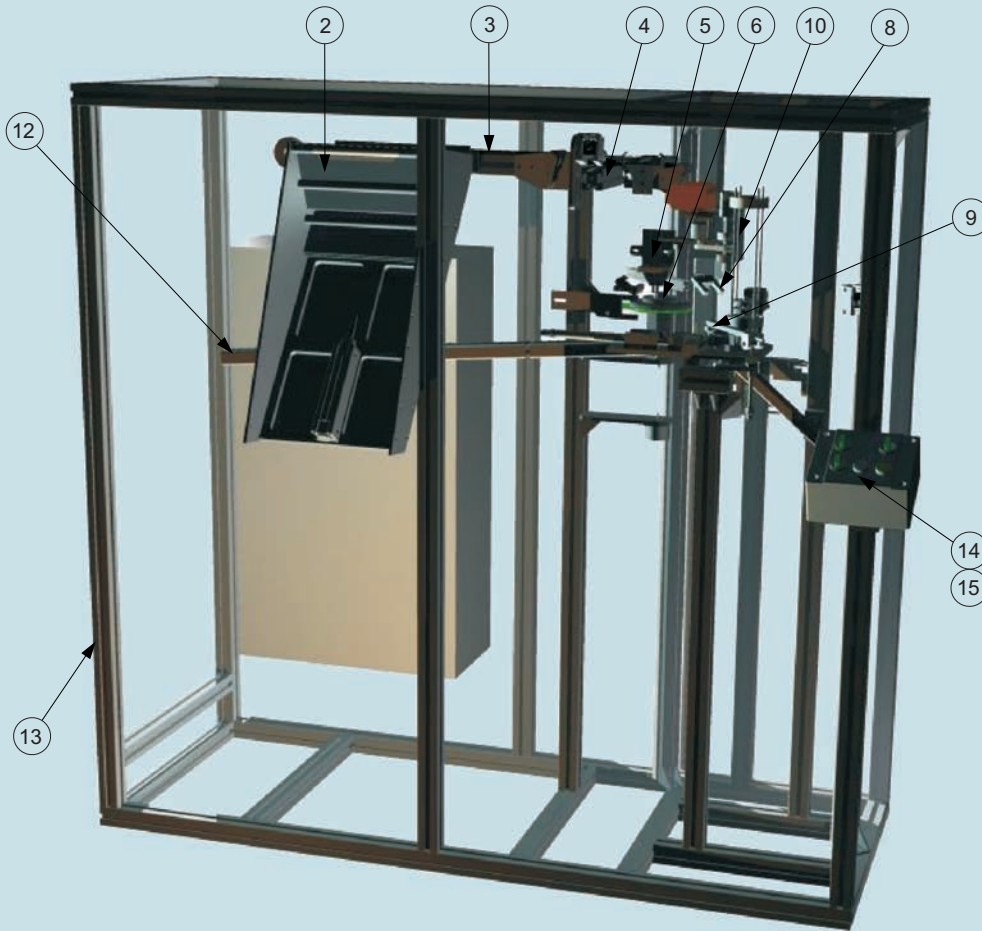

- 2. Senkrechtförderer
- 3. Prismenförderband
- 4. Kamera-Riemen 1
- 5. Sortierer
- 6. Taktförderer
- 8. Panorama
- 9. Fallsituation Riemen 2 - 3
- 10. Revolvermagazin
- 12. Abführförderer
- 13. Profilkonstruktion
- 14. Störmelder & Bedienerblatt